

A3U Series Pushbutton and Selector Switches

22 mm Dia. Flat-type Lighted and Non-Lighted Pushbutton Switches and Selector Switch









- Easy connector enables less assembly and less wiring
- 50 mm body length
- Easy one push to connect the Operation and Switch units



Easy one push to connect!




Ordering Information

	Lighted Pushbutton Switches		Non-lighted Pushbutton Switches		Selector Switch
Appearance					
Model Number	A3UL-TBU-2A1C-M	A3UL-TBU-3A1C-M	A3U-TBK-A1C-M	A3U-TBW-A2C-M	A3US-SB-2M-AC
Contact Form	SPDT	SPDT	SPDT	DPDT	SPDT
Operation	Momentary action		Momentary action		Manual-reset
LED Voltage	DC12V	DC24V	N/A		N/A
Available colors					

Typical Applications

- Semiconductor manufacturing machines
- Packaging equipment
- Food & beverage industry

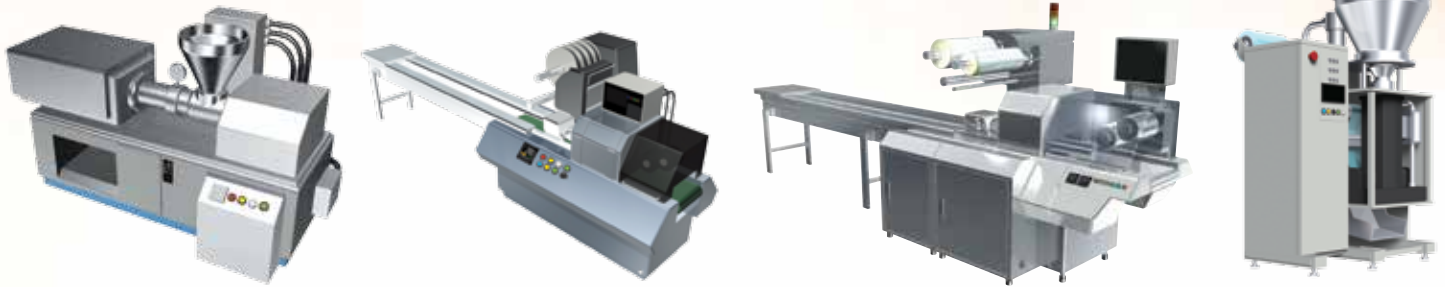

Specifications

Classification	Item	Specification
Structure	Figure of operating unit	Round type
	Degree of protection	IP40 or IP65
	Color of operating unit	Flange : Black or Silver Cap : Red, Yellow, Green, White, Black, Blue and Transparent
	Color of LED illumination	Illumination color : Red, Yellow, Green, Amber, White and Blue
Rated voltage for LED		5V DC, 12V DC, or 24V DC
Switch operation		Momentary and Snap action
Contact form		1C (SPDT) or 2C (DPDT)
Terminal type		Connector (Type PA 10 pins, JST Mfg. Co., Ltd)
Electrical rating	Rated load	0.1A @ 30V DC at resistive load
	Minimum applicable load	1mA a@ 5V DC (reference value)
Durability	Electrical	200,000 operations min. (0.1A@30 VDC at resistive load)
	Mechanical	1000,000 operations min.
Dielectric strength		Between contacts of same polarity: 500V Between current-carrying metal parts and ground: 1,500 V
Storage conditions	Storage temperature and humidity	-40° to 70°C / 35 % to 85 % RH (with no icing)
Operating conditions	Ambient operating temperature and humidity	Lighted type -25° to 55°C / 35% to 85% RH
		Non-lighted type -25° to 70°C / 35% to 85% RH
Safety standards		UL508, CSA 22.2, No.14, EN60947-5-1

OMRON AUTOMATION AND SAFETY • THE AMERICAS HEADQUARTERS • Schaumburg, IL USA • 847.843.7900 • 800.556.6766 • www.omron247.com

OMRON CANADA, INC. • HEAD OFFICE
Toronto, ON, Canada • 416.286.6465 • 866.986.6766 • www.omron247.com

OMRON ARGENTINA • SALES OFFICE
Cono Sur • 54.11.4783.5300

OMRON ELECTRONICS DE MEXICO • HEAD OFFICE
México DF • 52.55.59.01.43.00 • 001.800.556.6766 • mela@omron.com

OMRON CHILE • SALES OFFICE
Santiago • 56.9.9917.3920

OMRON ELECTRONICS DE MEXICO • SALES OFFICE
Apodaca, N.L. • 52.81.11.56.99.20 • 001.800.556.6766 • mela@omron.com

OTHER OMRON LATIN AMERICA SALES
54.11.4783.5300

OMRON ELETRÔNICA DO BRASIL LTDA • HEAD OFFICE
São Paulo, SP, Brasil • 55.11.2101.6300 • www.omron.com.br

OMRON EUROPE B.V. • Wegalaan 67-69, NL-2132 JD, Hoofddorp, The Netherlands. • Tel: +31 (0) 23 568 13 00 • Fax: +31 (0) 23 568 13 88 • www.industrial.omron.eu